

Drop In 5 Burner Gas BBQ in Stainless Steel

SIR-DG3101-SS




Features & Benefits

Warranty	3 Year Manufacturer Warranty
Stylish Drop-In Design	A modern, classy finish where the BBQ drops down into the benchtop of your cabinetry. The slimline enclosed hood helps to give a more low-profile look to the BBQ.
Slimline Double-Skinned Hood	Double layer within the hood offers improved insulation and heat retention when cooking with the hood closed resulting in improved efficiency and a more steady temperature.
304 Grade Stainless Steel	High grade stainless steel which is very resistant to heat and salt helping to avoid corrosion and decay within the harsh Australian climate.
High Quality Burners With Even Heat Dispersion	4 x high quality tube burners made from 304 grade stainless steel. Flame tamers assist with even heat distribution while reducing flare ups, providing excellent grilling experience.
Infrared Burners	1x Under Tepp and 1x Rotisserie infrared burner, used to sear meats without disturbing the moisture boundary, so food will still remain juicy and tender
Rotisserie	This rotisserie kit includes a motor, rod, and forks, can hold up to 7kg of food, and is designed to be plugged into a 10-amp GPO for power
Stainless Steel Warming Rack	Provides additional space for already cooked food that you want to keep warm.
Stainless Steel Grill and Teppanyaki Plates	Removable and reversible open grill plates made from high quality stainless steel and 5mm Stainless Steel Teppanyaki Plate with easy lift handles
Comfort Electronic Ignition System	Safe and easy allowing you to light without the use of flammable and explosive matches and lighters.
Ergonomic Controls	Conveniently located to the side of the BBQ helping maximise the grilling surface with power level indicators.
LED Lighting on Controls	Each control knob features long-lasting & energy efficient LED lights helping to make night time entertaining super easy and safe.
UV Protected Cover	Last longer and look better with the free weather proof cover
Oil Management System	Easy access and simple cleaning with the removable grease cup.
Conversion To Natural Gas	Equipped for LPG out of the box and can be converted for usage with Natural Gas by an authorised professional. (Conversion kit needs to be purchased separately)
Indoor/Outdoor Installation	Certified for installation in enclosed alfresco areas; this is where your area is enclosed by a roof and 3 walls, and the area has 25% natural air ventilation.

Drop In 5 Burner Gas BBQ in Stainless Steel

SIR-DG3101-SS

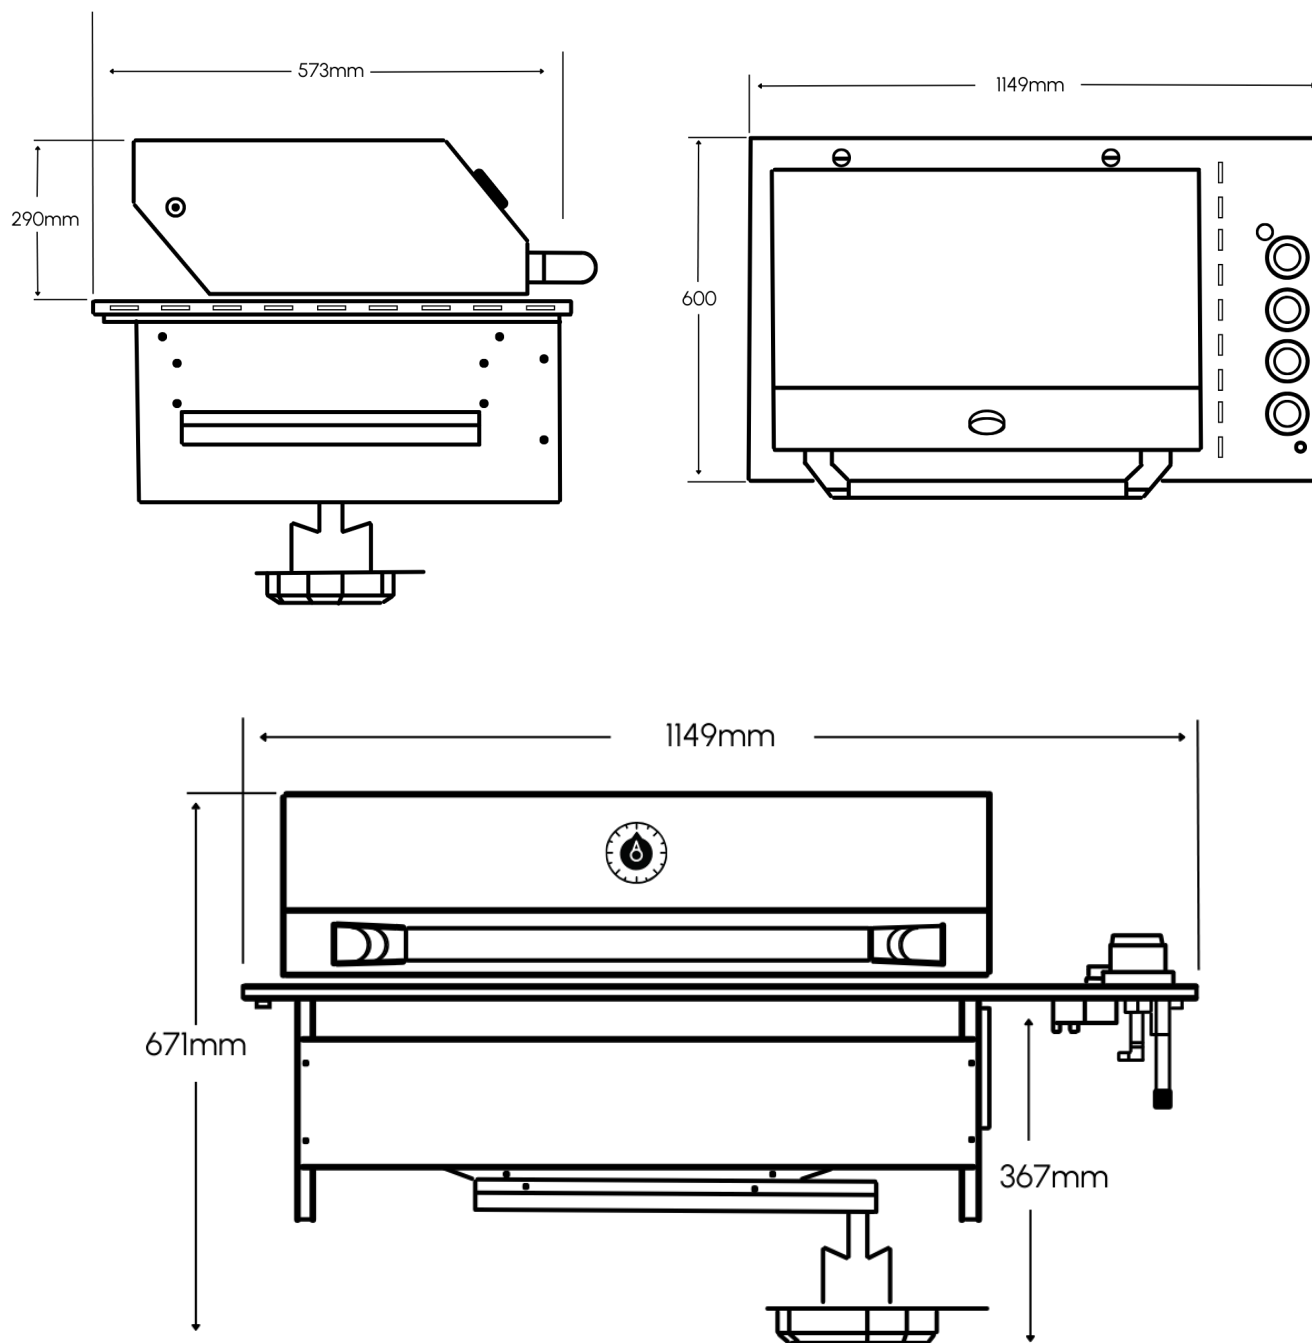

WARNING: Technical specifications and product sizes can be varied by the manufacturer without notice. Cut outs for appliances should only be physical product measurements. The above information is indicative only.

Minimum clearances to combustible materials must be maintained.


For Natural Gas Conversion please refer to the product user manual. This process should only be done by an authorised professional.

Drop In 5 Burner Gas BBQ in Stainless Steel


SIR-DG3101-SS



Installation - Cabinetry Cut-Out

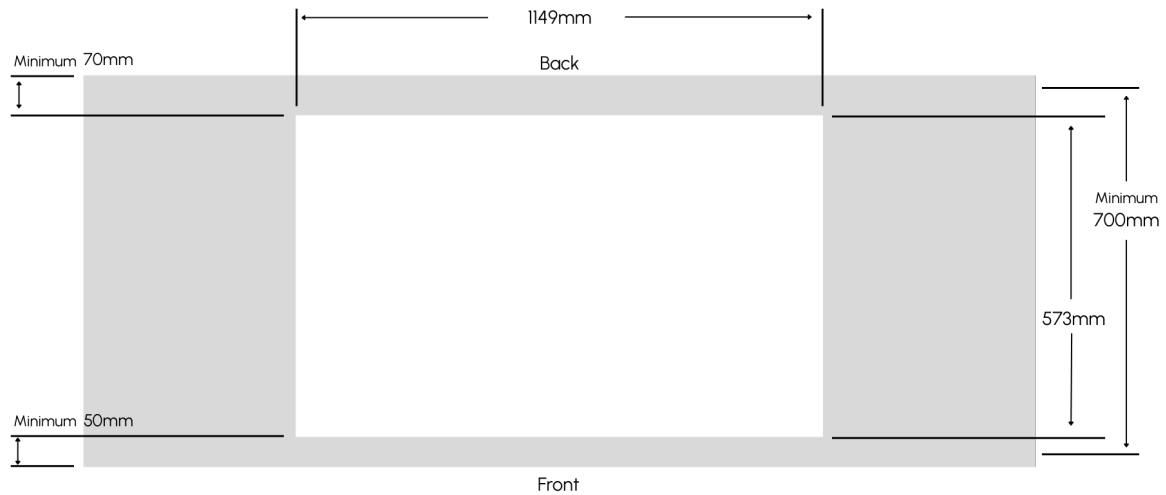

Installation - Minimum Clearances

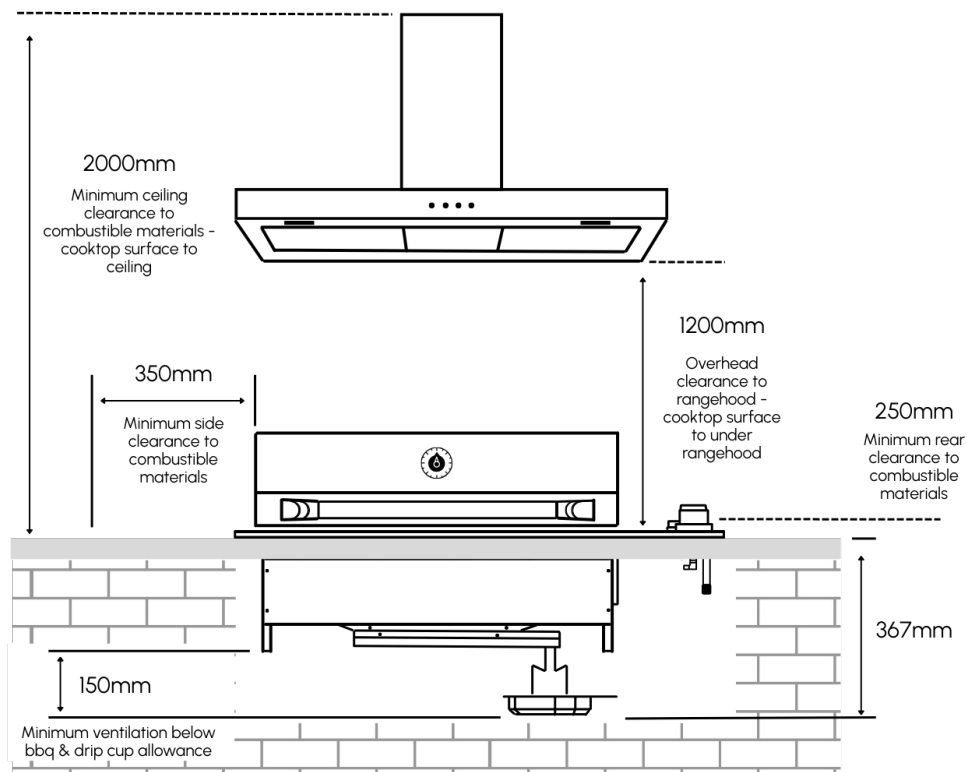

- The cabinetry must allow front access underneath the BBQ to allow access to clean/remove the drip cup
- The bunchtop/substrate must be able to support the weight of the BBQ which is mentioned in the technical specifications. We recommend a minimum thickness 20mm for the bunchtop
- If an LPG bottle is to be stored in the enclosure under the BBQ unit, it must be isolated from the BBQ unit with a non-combustible panel. The enclosure must comply with the requirements of AS/NZS 5601.1. This is to allow any residual gas to escape from the cavity.

Drop In 5 Burner Gas BBQ in Stainless Steel

SIR-DG3101-SS



Model	SIR-DG3101-SS
Fuel	LPG Standard - Conversion to Natural Gas with conversion kit - see user manual
Indoor/Outdoor Installation	Certified for installation in enclosed alfresco areas; this is where your area is enclosed by a roof and 3 walls, and the area has 25% natural air ventilation. Recommended range hood with optional Interlocking System.
BBQ Construction	304 Grade Stainless Steel
Tube Burners	304 Grade Stainless Steel
Flame Tamers	304 Grade Stainless Steel
Double Skinned Hood	Yes
Total Gas Consumption LPG	59.5mj/h
Motorised Rotisserie	Yes
Control Lighting	Blue LED Lighting on Control Knobs
Internal Cavity Lighting	2 Internal Halogen Lights
Ignition	Comfort Electronic Ignition System
Flame Failure Safety Shut-Off	Yes
Grill Plate Material	5mm Stainless Steel
Total Cooking Area	(w) 865mm x (d) 450mm
Open Grill Plate Dimension	1 x (w) 510mm x (d) 456mm
Teppanyaki Plate Dimension	1 x (w) 340mm x (d) 445mm
Gross Product Weight	65kg
Total Product Dimensions (hood closed)	(w) 1175mm x (d) 642mm x (h) 671mm includes drip cup
Cut Out Dimensions	(w) 1149mm x (d) 573mm <ul style="list-style-type: none">• Clearance of 390mm required below benchtop• Recommended benchtop thickness 20mm• 50mm front clearance + 70mm rear clearance Refer to dimensional drawings for more installation guides
Packaging Dimensions	(w) 1250mm x (d) 600mm x (h) 720mm